




MAGNUM - C

DURABLE BY DESIGN

CARTRIDGE BEARING SEAL

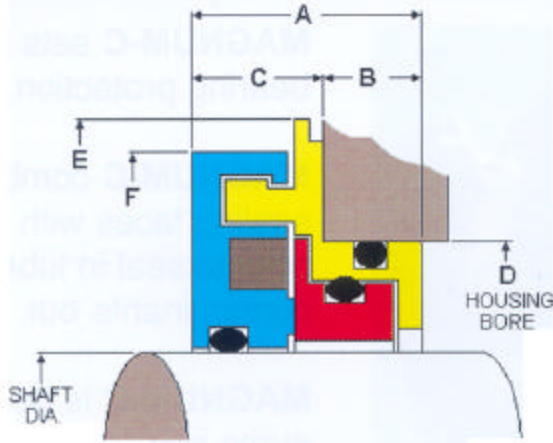

INCH SIZE SEALS

SHAFT DIA.	A	B	C	D minimum	E	F
750" to 2.000"	.780	.325	.455	SHAFT + .750	SHAFT + 1.500	SHAFT + 1.280
2.062" to 2.500"	.825	.325	.500	SHAFT + .750	SHAFT + 1.500	SHAFT + 1.280
2.562" to 2.875"	.875	.375	.500	SHAFT + 1.000	SHAFT + 1.750	SHAFT + 1.510
2.937" to 4.000"	.965	.375	.590	SHAFT + 1.000	SHAFT + 1.920	SHAFT + 1.660
4.062" to 8.000"	1.125	.500	.625	SHAFT + 1.000	SHAFT + 1.950	SHAFT + 1.670

METRIC SIZE SEALS

SHAFT DIA.	A	B	C	D minimum	E	F
20 to 50 mm	19.8	8.3	11.5	SHAFT + 19.05	SHAFT + 38.10	SHAFT + 32.51
51 to 63 mm	21.0	8.3	12.7	SHAFT + 19.05	SHAFT + 38.10	SHAFT + 32.51
64 to 73 mm	22.2	9.5	12.7	SHAFT + 25.40	SHAFT + 44.45	SHAFT + 38.35
74 to 101 mm	24.5	9.5	15.0	SHAFT + 25.40	SHAFT + 48.77	SHAFT + 42.16
102 to 200 mm	28.6	12.8	15.8	SHAFT + 25.40	SHAFT + 49.53	SHAFT + 42.42

SPECIFICATIONS

ROTARY FACE	: TFE COMPOSITE	MAX OPERATING CONDITIONS TEMPERATURE : 225 F PRESSURE : 5 PSIG SPEED Lubricated : 12, 000 FPM SPEED Dry : 4,000 FPM
STATIONARY FACE	: HT 17-4PH	
ADAPTER	: BRONZE or SS	
ELASTOMERS	: VITON STD.	
MAGNETS	: RARE EARTH	

Multi - National Distribution



ISOMAG Corp.
 11871 Dunlay Ave.
 Baton Rouge, LA 70809

Phone: 225-752-0926
 Fax: 225-756-3141
 Website: isomag.com